

# **BACKHOE** for Agricultural Tractor

**3 Point Hitch Type without Sub-Frame**



**BH660**



**BH760**



**BH860**




Mechanical Thumb



PTO Pump Sets



3 Point Hitch

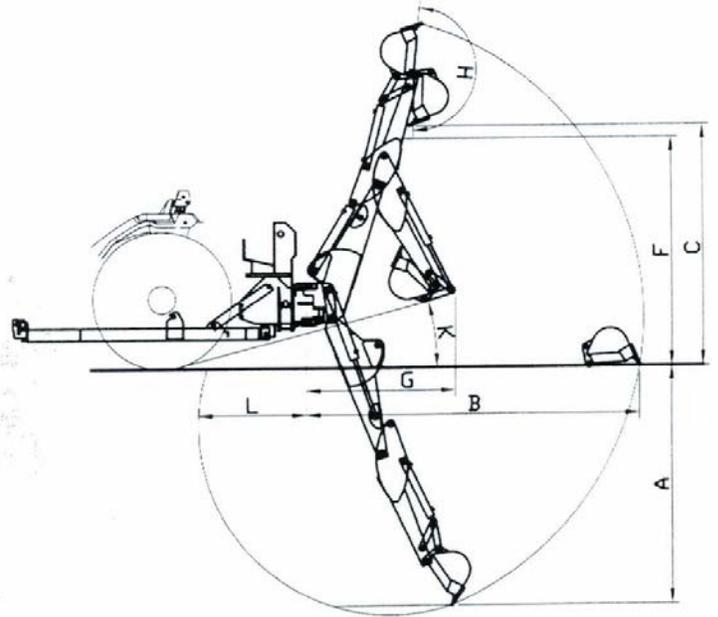

## ■ SPECIFICATIONS

MODEL	BH660	BH780	BH860
<b>A: Digging Depth</b>	<b>6'6"</b>	<b>7'6"</b>	<b>8'9"</b>
B: Reach from Swing Pivot	8'6"	9'4"	11'3"
C: Loading Height (Bucket @ 60°)	5'11"	6'7"	8'2"
D: Maximum Leveling Angle	8°	8°	8°
E: Swing Arc	180°	180°	180°
F: Transport Height (Maximum)	5'6"	6'3"	7'6"
G: Transport Overhang	3'8"	4'1"	4'10"
H: Bucket Rotation	180°	180°	180°
J: Stabilizer Spread (Down Position)	7'2"	7'2"	7'2"
L: Stabilizer Spread (Up Position)	4'8"	4'8"	4'8"
M: Angle of Departure	15°	20°	25°
N: Undercut	1'8"	3'0"	3'1"
<b>Bucket Cylinder Digging Force</b>	<b>2,920 lbs.</b>	<b>3,080 lbs.</b>	<b>3,670 lbs.</b>
Dipper Stick Cylinder Digging Force	1,850 lbs.	2,160 lbs.	2,310 lbs.
Shipping Weight (Including Bucket)	1,100 lbs.	1,300 lbs.	1,600 lbs.
Hydraulic Pressure Requirements	2,350 psi.	2,350 psi.	2,350 psi.
<b>Recommended Tractor HP Requirement</b>	<b>15-30 HP</b>	<b>25-45 HP</b>	<b>45-65 HP</b>



**Ansung-USA, LLC.**

Ph:972-242-4761

Email: sales@ansungusa.com

www.ansungusa.com